


®



The
Uni-Blinds[®]
 integral blind system
 is manufactured by Morley Glass and Glazing under licence from

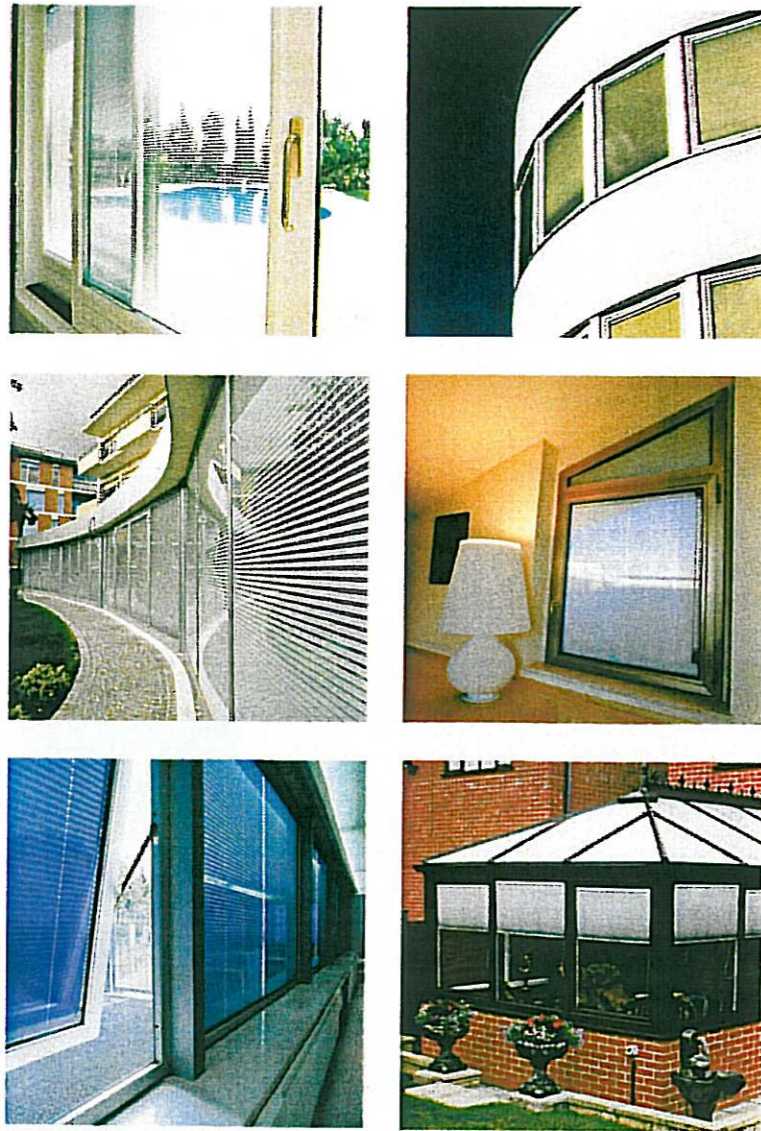

Gardinia



Gardinia Windows (Kirklees) Ltd
 3 Leeds Road Huddersfield HD1 6DD
 t. 01484 542912
 f. 01484 451932
 e. info@gardiniawindows.co.uk
 www.gardiniawindows.co.uk

The Revolutionary

Uni-Blinds

Integral Blind System

BY *Gardinia*



Uni-Blinds

Most of our every day activities are carried out indoors, whether at home, at work, at play or when following our own special interests. These activities are all governed by the amount of light required and our relationship to it. The products we manufacture are designed to achieve the optimum requirements for these activities. Our quest is to achieve the correct balance between the internal and external environment and it is with this as our objective that we apply our experience, knowledge and research.

Benefits

Uni-Blinds® is a system of blinds which are assembled and permanently sealed within the cavity of the double glazed unit. Once sealed in this totally dust free environment the blinds require no cleaning, always appear new and are protected from damage. Unlike external blind systems, Uni-Blinds® provide greatly enhanced sunshading features and also improve the u-value of the sealed unit.

Uni-Blinds®



Uni Blinds® venetian and pleated blinds are designed exclusively for use in double glazed units.

They are manufactured in accordance with high technical specifications and stringent production standards. The slat raising, lowering and tilting functions are achieved using a rotational magnetic transmission through the glass, guaranteeing the unit's hermetic seal. The external magnet, fixed to the glass by double-sided high performance adhesive, gives perfect alignment with the internal magnet. The raising and lowering is achieved using a continuous cord loop that drives the external magnet. The cord is held lightly under tension by a cord tensioner on the glass directly below the external magnet.

Features



- Clean for life
- Protection against deformation and damage by encapsulation
 - Maintenance free
- Pristine appearance of blinds at all times
 - No UV degradation
 - Improved solar control
 - Improved u-values
- 12.5mm slat available in white, beige and silver as standard

Style and Colour Options

Uni-Blinds® are available in two different styles and various colourways. A choice, based upon end use and personal preference, can be made between the continuous pleated option, with a choice of two colourways, or the venetian slatted blind in a choice of three colours as standard. All the blinds are fully colour co-ordinated within the cavity and have white external controls. An electrically operated system with numerous options is also available.

Non-fogging components

The components used in the production of Uni Blinds® kits for assembly inside the double glazed unit have been specially designed to avoid the release of substances that can jeopardise transparency of the glass (fogging effect), in compliance with BSEN 1279 regulation. External Institute Certification approval of this feature, and Pellini's own laboratory Testing and Assessment Team control the incoming quality of materials to ensure compliance with the agreed standards. Quality control personnel follow the procedures in accordance with the internal control scheme (ISO 9000). Besides the usual size and visual testing, special laboratory tests are performed to verify that the materials are compatible with their use in the double glazed unit.

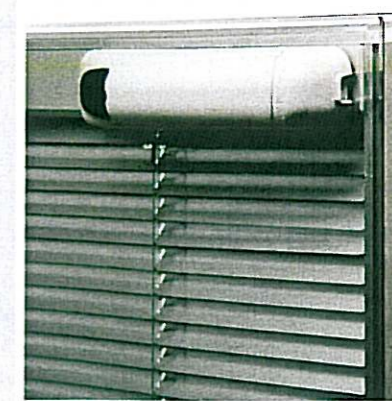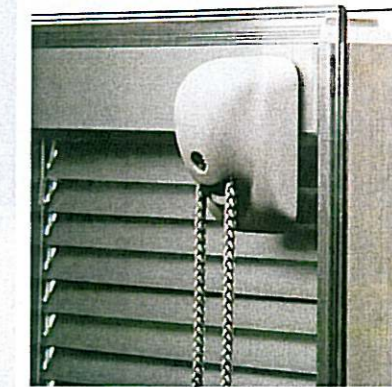

Dimensions

	minimum	maximum
Width	300mm	1000mm
Height	300mm	2000mm